



# SIL-AIR

## SIL-AIR 50/24



50 l/min - 1.77 CFM


8 bar - 116 psi

**Modello portatile con serbatoio verticale 24 litri**  
**Portable model with vertical 24-l air receiver**  
**Modèle portatif avec réservoir vertical 24 litres**  
**Tragbares Modell mit vertikalem 24-l-Druckbehälter**  
**Modelo portátil con depósito vertical de 24 litros**


Volt/Hz	l/min (CFM) *	l (Gal.)	Watt	dBA	Kg (Lbs)	Kg (Lbs)
230/50	37 (1.3)	24 (6.34)	340	40	27 (60)	29 (64)
115/60	44 (1.55)		400			

\* = @ 5 bar (72.5 PSI)

	A mm	B mm	C mm
	400	400	600
	420	420	640

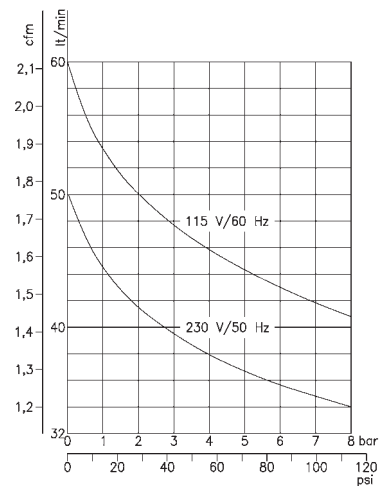

### OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES

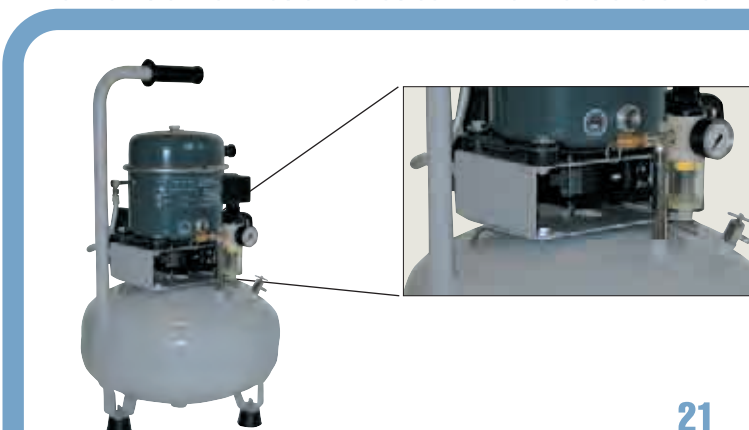

## SIL-AIR 50/24 V

**Motore con ventola di raffreddamento**  
**Model with cooling fan**  
**Modèle avec ventilateur de refroidissement**  
**Modell mit zusätzlichem Kühlventilator**  
**Modelo con ventilador de enfriamiento**